



CLASSE D400




850Q/900Q

■ Square Lisa

Flat grating series with square frame and round cover complying with the standard EN 124 and with the product certification's mark IGQ and conformity's mark UNI.

The grating is provided with huge flow slits, anti-slip floor area, a pawl of the hooking to the frame. The frame is shaped for a correct hook at the laying.




Product		Frame				Cover					
Article	Code	F mm	Ø mm	H mm	External board	C mm	P mm	Slits	Flow area	Standard package	Weight
Lisa 850 Q	S241085	850	Ø 610	100	Continuous, enforced with ribs, shaped with pit	Ø 650	23	[4X10] (1X5)	35%	10	64
Lisa 900 Q	S241087	850	Ø 702	100	Continuous, enforced with ribs, shaped with pit	Ø 743	23	[5X10] (1X5)	39%	10	75

750T

■ Lisa Tondo

Flat grating series with round frame and cover complying with the standard EN 124 and with the product certification's mark IGQ and conformity's mark UNI.

The grating is provided with huge flow slits, anti-slip floor area, a pawl of the hooking to the frame. The frame is shaped for a correct hook at the laying.

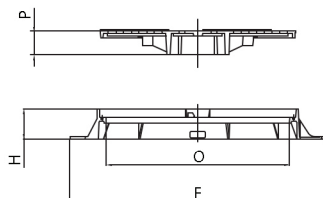


Product		Frame				Cover					
Article	Code	F mm	Ø mm	H mm	External board	C mm	P mm	Slits	Flow area	Standard package	Weight
Lisa 750 T	S242075	Ø 750	Ø 610	100	Continuous, enforced with ribs, shaped with pit	Ø 650	23	[4X10] (1X5)	35%	10	57







- ✓ The articulated system avoids the accidental extract of the grate when it is closed; the special structure blocks the accidental closure of the frame when it is open.

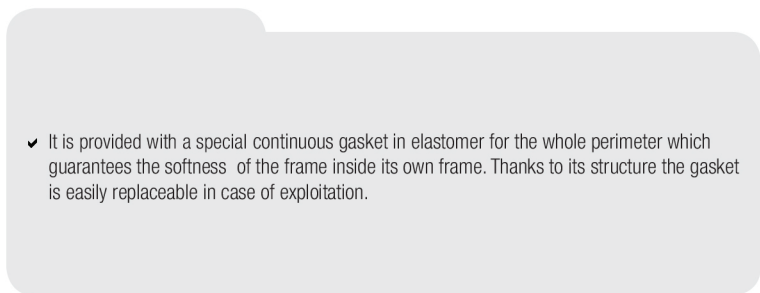

- ✓ It is provided with a special continuous gasket in elastomer for the whole perimeter which guarantees the softness of the frame inside its own frame. Thanks to its structure the gasket is easily replaceable in case of exploitation.

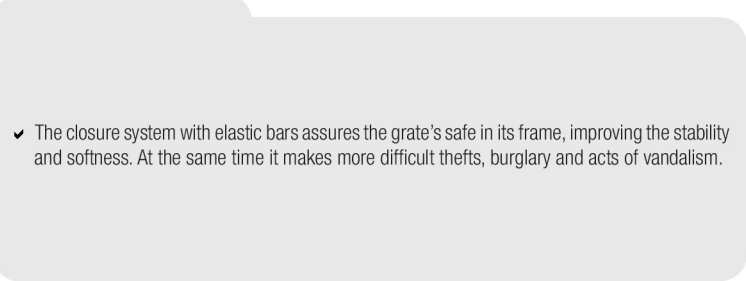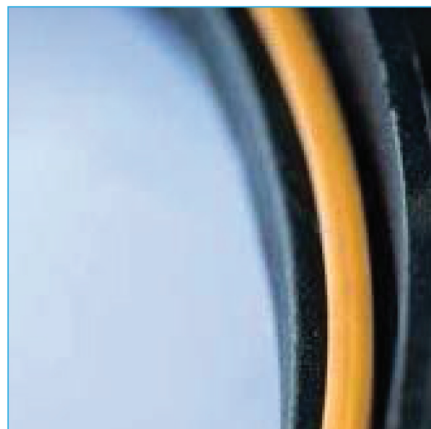

- ✓ The closure system with elastic bars assures the grate's safe in its frame, improving the stability and softness. At the same time it makes more difficult thefts, burglary and acts of vandalism.



AVAILABLE IN LOCKING SYSTEM VERSION – SEE PAGE 28-29

To order the locking system version you must add an "A" after the product code, i.e. S241085A