



**Manhole Cover REXESS Class D400 Square frame – Safety – Non Ventilated**

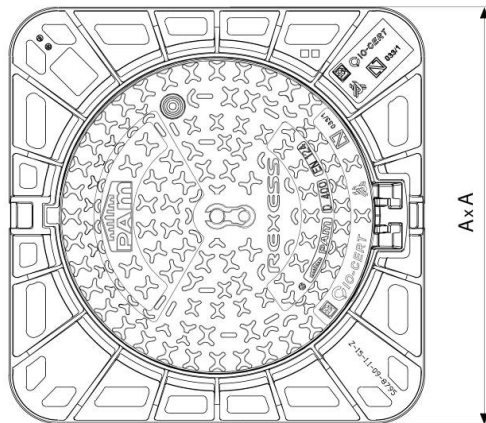

**GRUPPO R.B. s.r.l.**

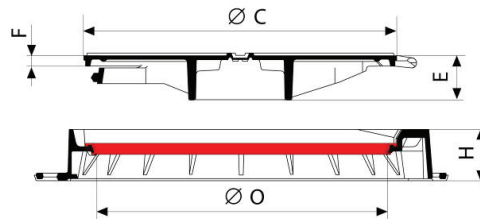

AxA	C	O	H	E	F	Mass of unit	Mass of Cover	Packaging	References of the unit
mm	mm	mm	mm	mm	mm	kg	kg		
850x850	645	600	100	92	22	65.0	31.5	10	CDRK60MY

**Material and coating:**

- Frame and cover in Ductile Iron EN GJS 400-15: water base coating
- Ring in PEPP

**Field of use:**

- Group 4 (class D 400) in accordance with EN124 standard: carriageways of roads (including pedestrian streets), hard shoulders and parking areas, for all types of road vehicles
- Normal traffic and periodic inspections.

**Main characteristics:**

- Automatic locking by ductile iron spring bar

**REXESS  
MUNICIPAL CASTINGS**



11/25/2015

**VD40REURXS300**

- Hinged cover, opens to 110°, blocks at 90° when closing
- Interchangeable cover with ventilated version
- Optimized frame for bedding
- Optional locking system
- Optional cover anti-theft spline (disable the 90° blocking function)